




SQUARE LASHING

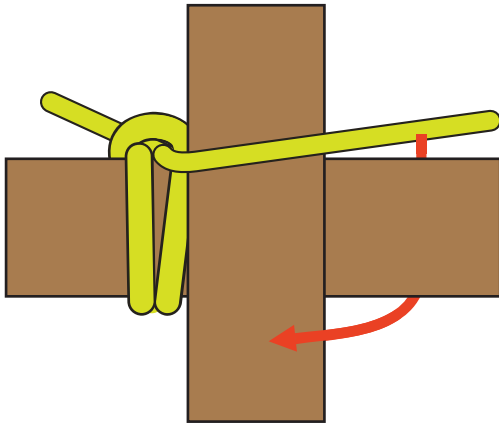


Step 1
FIXED

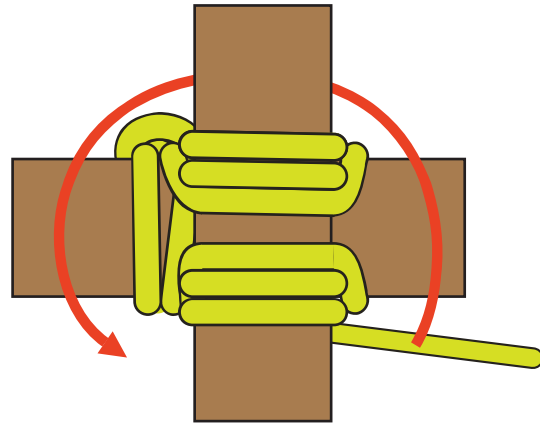

Step 2
WRAPPED

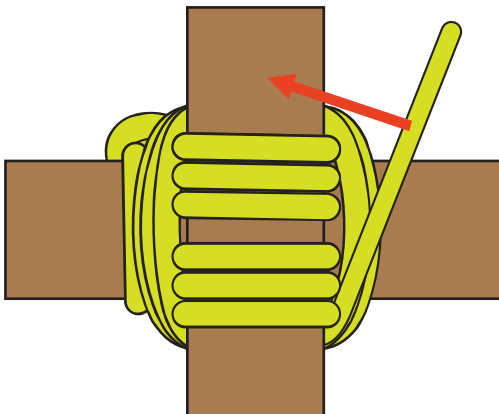

Step 3
FRAPPED

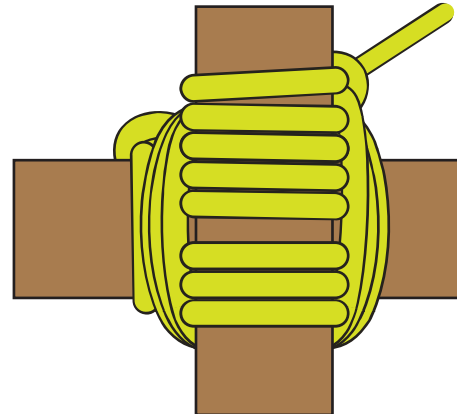

Step 4
FIXED

1. Fix the end of the lashing line to one of the objects. Although a clove hitch is shown a round turn & two half hitches, a girth hitch with the spliced eye or even the spliced eye on its own will do.
2. Wrap and tension the lashing line around the objects. Lay or dress the lashing line so that each wrap sits alongside the previous wrap without any crossovers. Wraps will move outwards on one of the objects and inwards on the other object.
3. The frapping turns apply additional tension and friction that further secures the objects.
4. Fix the finished end with a clove hitch directly to the object.